

Parksafe - Product Specification Sheet



Speaking Reverse Audible Alarm

The rear blind spot can be a huge problem for HGV and LCV vehicles, with our Audible Reverse Alarms it can become a useful tool in order to alert other traffic and/or pedestrians.

Key Specification:

- Rated Voltage: 12 ~ 24V DC
- Sound pressure: Normal Model 97dB ±4dB(A) @ 4ft
- Rated current: 0.6 Amperes or less
- Two bolt mounting
- Size: (W*H*D): 103mm x 64mm x 45mm,
- Hole centers: 75-85mm
- 3 wire connection
- Frequency: 500Hz ~ 7KHz
- Duty: 3.5 S/T (Vocal Reverse Warning)
"Beep, Beep, Beep, Warning this vehicle is Reversing"

Additional Specification:

- Water resistant: IP68
- Operating Temperature: -40°C ~ +85°C
- Warranty: 2 Years
- Alarm mute function offered by Yellow wire

The product is normally to be fitted at the rear of the vehicle behind the rear bumper.

Approvals & Certifications:


CE, Emark

Box Contents:

Alarm with three way Superseal Connector, guide



REVV01

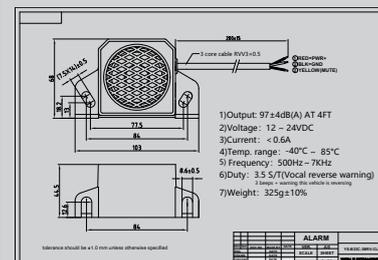

Date Created:

30/03/2021

Specification Sheet
Number:

JAY10010081

Version:

V1.1

Box Dimensions (WxDxH):

110mm x 85mm x 65mm

E2410R06/01*3647*00